## Cleveland

### ELECTRIC CHAIN HOIST

#### Models

- CHE1005M
- CHH101MCHR102M



#### Standard Features

- 1/2, 1, & 2 ton capacity Chain Hoist
- 8 feet per minute Hoist lifting speed
- Motor driven, low head room trolley with four special crown tread wheels

Project . Item

Quantity \_\_\_\_\_ FCSI Section 11400\_\_\_ Approved \_\_\_\_\_

Date

- Heavy-duty Hoist motor with multiple disc brake
- Overload Protection automatically stops the lift when overload is being sensed
- Lifetime lubricated gears which require no oil in the transmission
- Impact resistant Control Station with snap action contacts for positive control
- Internal cable strain relief for Control Station
- Complete with lifting Chain, bottom Hook,Safety Lock and Chain Container
- Stainless steel Rail with End-Stops
- Accepted for use in U.S.D.A. Inspected Facilities

#### Short Form Specifications


Shall be CLEVELAND Model CH \_\_\_\_\_\_, Electric CHAIN HOIST and MONORAIL SYSTEM. \_\_\_\_\_ ton capacity, motor driven Trolley with special crown tread wheels, 8 feet per minute lifting speed, overload protection, disk brakes, lifetime lubricated gears, impact resistant Control Station, lifting Chain with safety-lock hook and chain container.

#### **Options & Accessories**

- Hanger Rods (specify length)
- Rail Hanger Brackets
- Universal Beam Clamps
- Remote Control System
- Curved sections
- Rail Coupling to support Rail at joint
- Automatic Cord Reel
- · Festooned stainless steel cable for power cord
- Stainless steel chain (1/2 and 1 ton only)
- Stainless steel bottom hook
- Stainless steel chain container
- Stainless steel chain hook (1/2 and 1 ton only)

Tel 1.216.481.4900 Fax 1.216.481.3782 Email steam@clevelandrange.com www.clevelandrange.com Section 11, Page 49 03 / 2020

# Cleveland

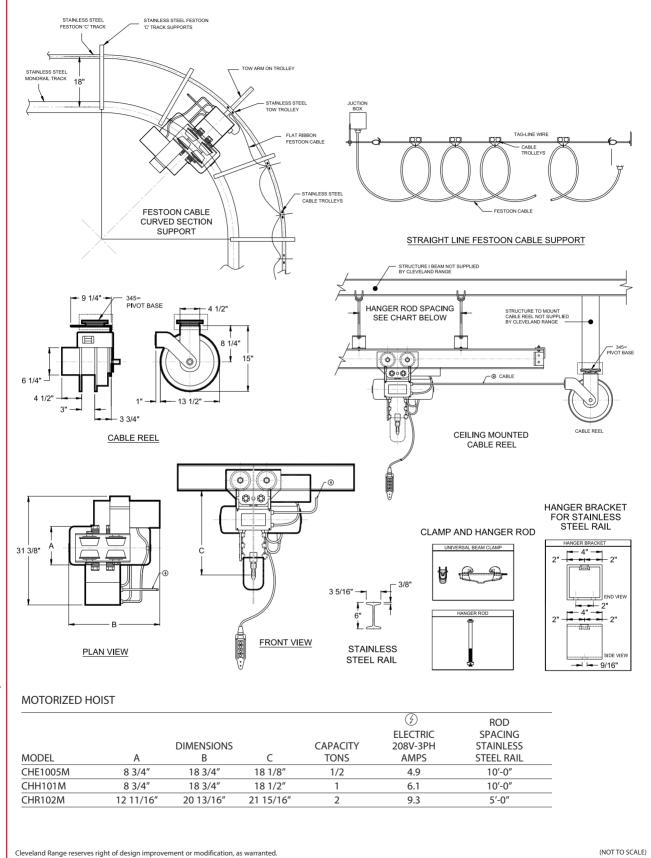

**Cook Chill Systems** 

760 Beta Drive, Unit D Mayfield Village, Ohio 44143 Tel 1.216.481.4900 Fax 1.216.481.3782 Email steam@clevelandrange.com www.clevelandrange.com Section 11, Page 50 03 / 2020

Timeless Quality, Trusted For Life ®