

DriTec - ShelleyGlas

Mobile dry hot serving counters

Models

- KFWH-1-NU 1 Low Watt Dry Hot Well Counter
- KFWH-2-NU 2 Low Watt Dry Hot Well Counter
- KFWH-3-NU 3 Low Watt Dry Hot Well Counter
- KFWH-4-NU 4 Low Watt Dry Hot Well Counter
- KFWH-5-NU 5 Low Watt Dry Hot Well Counter
- KFWH-6-NU 6 Low Watt Dry Hot Well Counter



KFWH-3-NU

Standard Features

- NSF-4 certified for hot operation
- Wells operate independently for low watt hot operation
- Flush mount pans standard
- Dry operation only - No water required
- Control panel(s) with lighted on/off rocker switch and thermostatic temperature controls
- 14-gauge stainless steel top
- One-piece, molded fiberglass pylon base, fully rounded corners, permanent color
- All corners and center sides reinforced with bracing, laminated into fiberglass
- Fire code rating on fiberglass
- High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout
- Environmentally friendly R290 GreenGenius refrigerant
- Cord and plug supplied standard
- 2-years parts and labor warranty,

Options & Accessories

- Counter heights available from 28" to 36"
- Tray slides and work shelves
- Food shields
- Stainless steel overself
- Understorage
- Adapter bars for fractional pans
- Recessed sheet pan option
- Décor packages

Specifications

Top: Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.


Interior: Interior liner is constructed of aluminum with flush mount flange for low watt heating to accommodate up to 6" (15cm) deep 12"x20" pans, supplied by others. Dry operation only, no water required.

Exterior body: Exterior body is seamless, one-piece molded fiberglass, having perfectly smooth exterior surface with all corners fully rounded. The fiberglass reinforced polyester (F.R.P.) is molded with permanent color. Stress points are internally reinforced.


Operation: Remote control panel contains a lighted on/off power switch and thermostat for heated operation.

Casters: unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyurethane casters and plate brakes. Overall height of caster assembly is 6" (15cm)





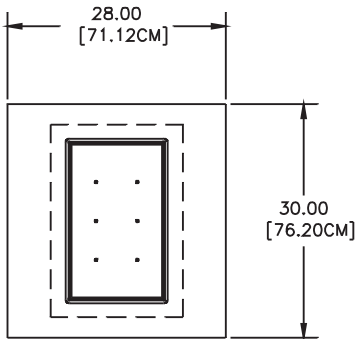


KFWH-1-NU

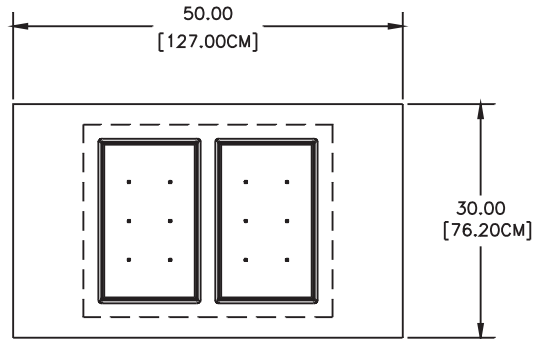


KFWH-2-NU


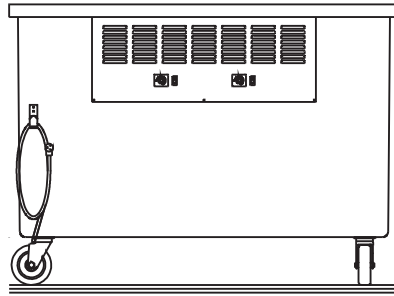
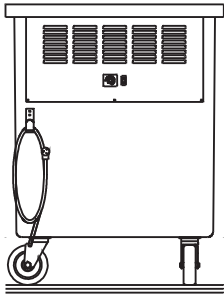


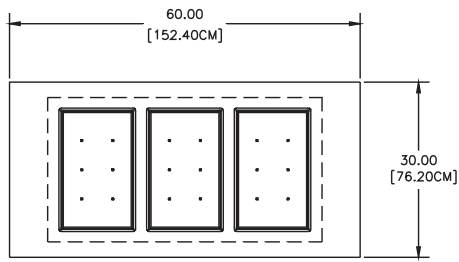


KFWH-3-NU

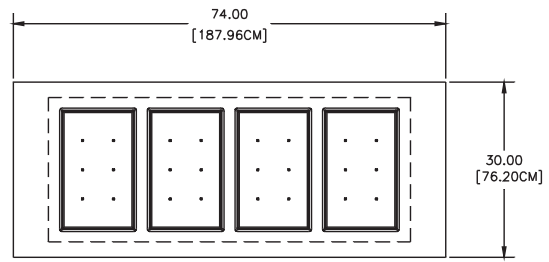


KFWH-4-NU

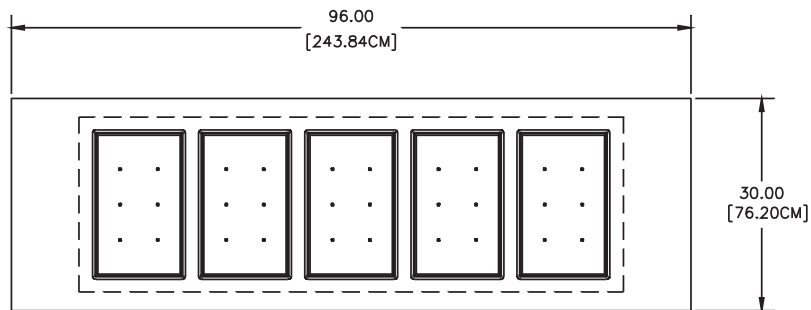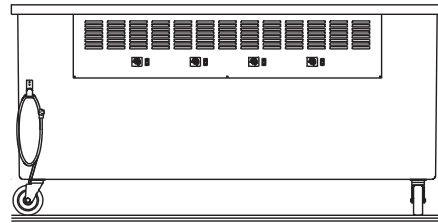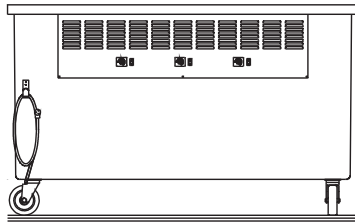



KFWH-5-NU

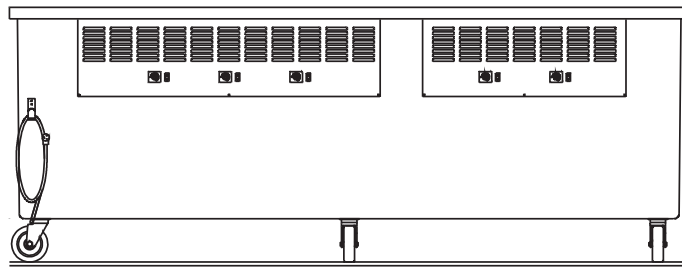

Welbilt reserves the right to make changes to the design or specifications without prior notice.

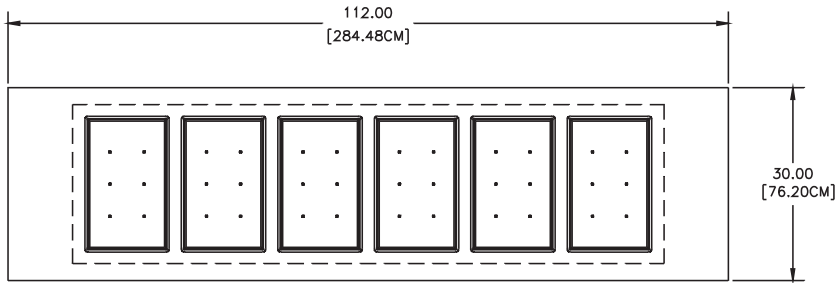

KFWH-6-NU

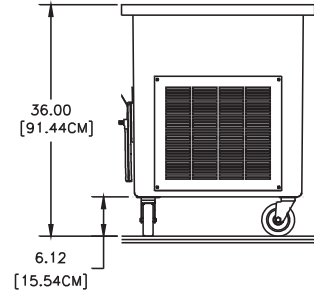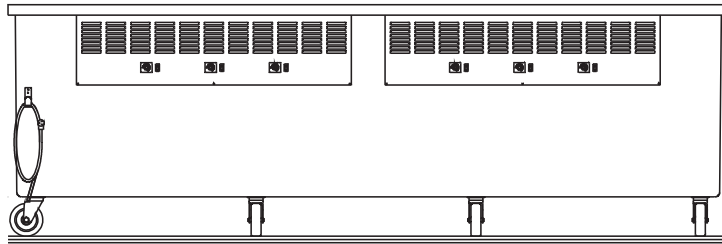

TYP END VIEW

DriTec - ShelleyGlas

Specifications						
Model	12" x 20" Pan Capacity	Hot Electrical <i>500 watt per well, Amps per well</i>	Nema Plug	BTU Load	System Capacity	Ship Weight
KFWH-1-NU	1	500 W, 208Y-240 V, 2.0 A	14-20P	331	870	300
KFWH-2-NU	2	(2) 500 W, 208Y-240 V, 4.0 A	14-20P	662	1740	380
KFWH-3-NU	3	(3) 500 W, 208Y-240 V, 6.0 A	14-20P	993	2610	460
KFWH-4-NU	4	(4) 500 W, 208Y-240 V, 8.0 A	14-20P	1324	3480	550
KFWH-5-NU	5	(5) 500 W, 208Y-240 V, 10.0 A	14-20P	1655	4350	660
KFWH-6-NU	6	(6) 500 W, 208Y-240 V, 12.0 A	14-20P	1986	5220	720