

DriTec - ShelleySteel

Mobile dry hot serving counters

DriTec - ShelleySteel

Models

- SFWH-1-NU 1 Low Watt Dry Hot Well Counter
- SFWH-2-NU 2 Low Watt Dry Hot Well Counter
- SFWH-3-NU 3 Low Watt Dry Hot Well Counter
- SFWH-4-NU 4 Low Watt Dry Hot Well Counter
- SFWH-5-NU 5 Low Watt Dry Hot Well Counter
- SFWH-6-NU 6 Low Watt Dry Hot Well Counter



SFWH-3-NU

Standard Features

- NSF-4 certified for hot operation
- Wells operate independently for low watt hot operation
- Flush mount pans standard
- Dry operation only - No water required
- Control panel(s) with lighted on/off rocker switch and thermostatic temperature controls
- Stainless steel top and exterior body
- 14-gauge galvanized bottom
- High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout
- Environmentally friendly R290 GreenGenius refrigerant
- Cord and plug supplied standard
- 2-years parts and labor warranty, standard parts warranty

Options & Accessories

- Counter heights available from 28" to 36"
- Tray slides and work shelves
- Food shields
- Stainless steel overself
- Understorage
- Adapter bars for fractional pans
- Recessed sheet pan option
- Décor packages
- Laminated exterior

Specifications

Top: Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.


Interior: Interior liner is constructed of aluminum with flush mount flange for low watt heating to accommodate up to 6" (15cm) deep 12"x20" pans, supplied by others. Dry operation only, no water required.

Exterior body: Exterior body is seamless, one-piece molded fiberglass, having perfectly smooth exterior surface with all corners fully rounded. The fiberglass reinforced polyester (F.R.P.) is molded with permanent color. Stress points are internally reinforced.


Operation: Remote control panel contains a lighted On/Off power switch and thermostat for heated operation.

Casters: unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyurethane casters and plate brakes. Overall height of caster assembly is 6" (15cm)





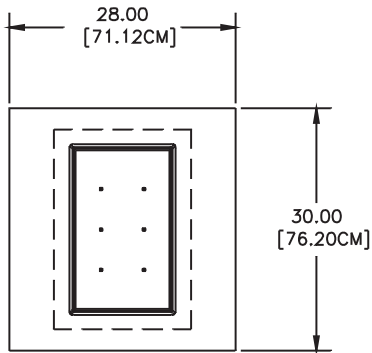


SFWH-1-NU

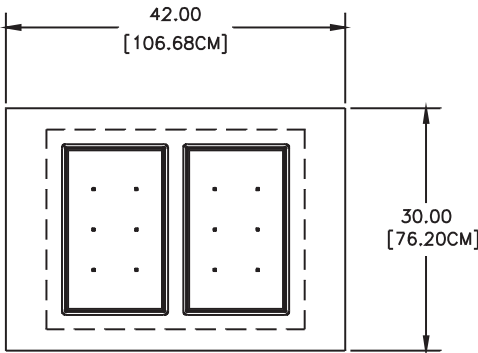


SFWH-2-NU


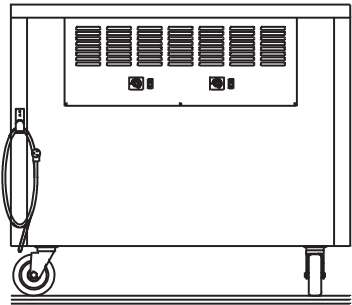



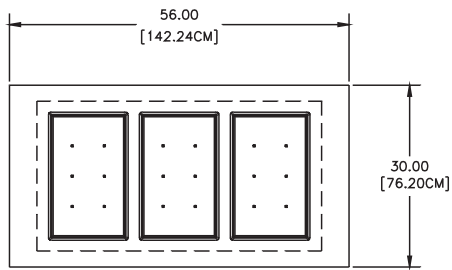


SFWH-3-NU

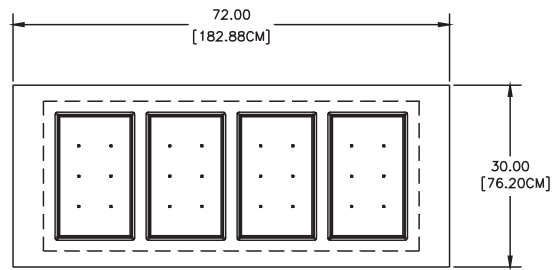


SFWH-4-NU

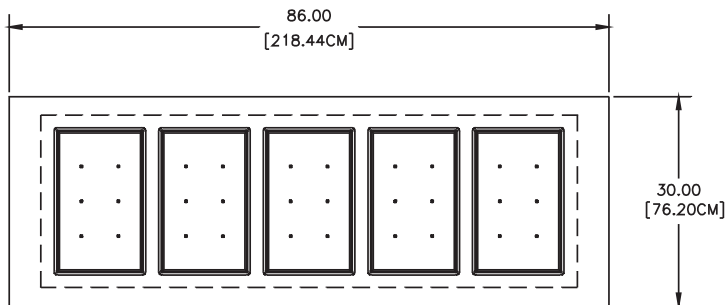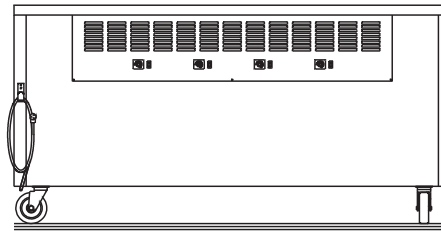



SFWH-5-NU

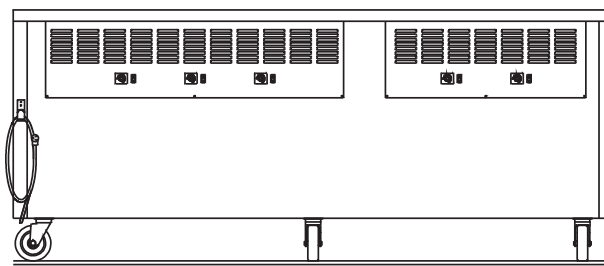

Welbilt reserves the right to make changes to the design or specifications without prior notice.

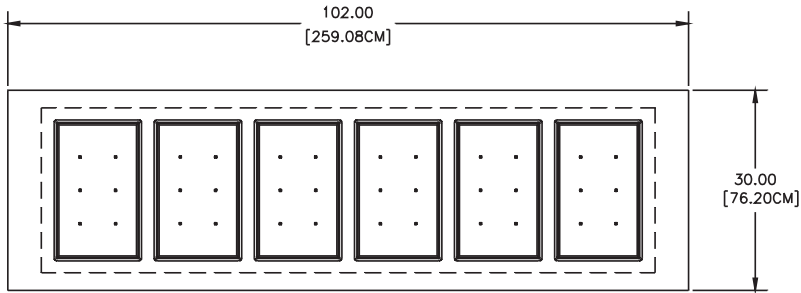

SFWH-6-NU

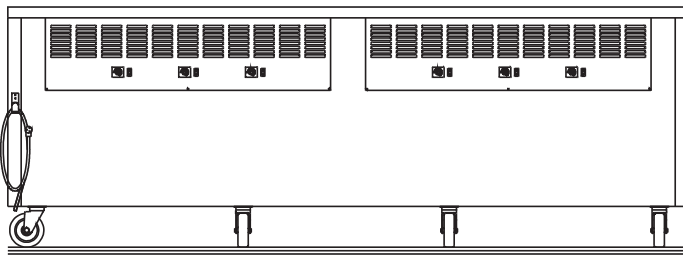

TYP END VIEW

Specifications						
Model	12" x 20" Pan Capacity	Hot Electrical <i>500 watt per well, Amps per well</i>	Nema Plug	BTU Load	System Capacity	Ship Weight
SFWH-1-NU	1	500 W, 208Y-240 V, 2.0 A	14-20P	331	870	300
SFWH-2-NU	2	(2) 500 W, 208Y-240 V, 4.0 A	14-20P	662	1740	380
SFWH-3-NU	3	(3) 500 W, 208Y-240 V, 6.0 A	14-20P	993	2610	460
SFWH-4-NU	4	(4) 500 W, 208Y-240 V, 8.0 A	14-20P	1324	3480	550
SFWH-5-NU	5	(5) 500 W, 208Y-240 V, 10.0 A	14-20P	1655	4350	660
SFWH-6-NU	6	(6) 500 W, 208Y-240 V, 12.0 A	14-20P	1986	5220	720