

Project	_____
Item	_____
Quantity	_____
FCSI Section 11400	_____
Approved	_____
Date	_____

Models

- FLT0015




Standard Features

- Replacement Cartridge for FLT0043 High Water Hardness Filter
- Reduces chlorine taste & odor and other offensive contaminants that can adversely affect the taste of water and beverages
- Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
- Finely polishes water for high quality beverage and food applications
- Reduces extra fine dirt and particles as small as five (5) microns in size*
- Carbon Block Filter
- NSF Certified NSF/ANSI

Installation & Operating Tips

- Install vertically with cartridge hanging down.
- Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- Flush cartridge by running water through system for five (5) minutes at full flow.
- Change cartridges on a regular six (6) month preventative maintenance program.
- Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- Always flush the filter cartridge at time of installation and cartridge change.
- Service Flow Rate: Maximum 2.5 gpm (9.46 Lpm)
- Rated Capacity: 10,000 gallons (37,854 L)

Cleveland

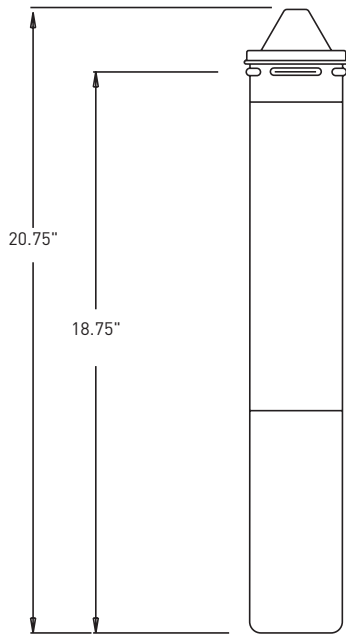

Specifications

- **Service Flow Rate**
Maximum 2.5 gpm (9.46 Lpm)
- **Rated Capacity**
10,000 gallons (37,854 L)
- **Pressure Requirements**
10 - 125 psi (0.7 - 8.6 bar), non-shock
- **Temperature**
35 - 100°F (2 - 38°C)
- **Overall Dimensions**
20.75" L x 3.25" D (52.7 cm x 8.2 cm)



System Tested and Certified by NSF International against NSF/ANSI Standard 42 for the reduction of:

STANDARD NO. 42 —
AESTHETIC EFFECTS

Chemical Reduction
Taste & Odor
Chlorine

WATER FILTERS GUIDELINES FOR CLEVELAND STEAMERS													
		MAXIMUM FLOW RATE *				SIZING RECOMMENDATIONS							
	INITIAL FILL AT START UP (Gallons)	MAX GAL./MIN	MAX GAL./HOUR	MAX GAL./HOUR/ PAN	MAX GAL./DAY (8 Hour Day)	MEETS WATER REQUIREMENTS Cleveland	Cartridges Cleveland	DOES NOT MEET REQUIREMENTS - HIGH HARDNESS +170PPM, pH below 8.5 ph, Cleveland	Cartridges Cleveland	DOES NOT MEET REQUIREMENTS - REVERSE OSMOSIS WITH MINERAL ADDITION Cleveland	SUGGESTED FILTER CHANGE FREQUENCY	RO PRODUCTION GPD OPTIMAL (77 F)	STORAGE TANK CAPACITY
STEAMCHEF SERIES (BOILERLESS)													
22CET3.1 - Energy Star	1.10	0.07	4.0	1.3	32.00	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0031	ANNUAL	175	16
22CET6.1 - Energy Star	1.10	0.07	4.0	0.7	32.00	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0031	ANNUAL	176	16
22CGT3.1 - Energy Star	1.10	0.07	4.0	1.3	32.00	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0031	ANNUAL	177	16
22CGT6.1 - Energy Star	1.10	0.07	4.0	0.7	32.00	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0031	ANNUAL	165	16
STEAMCRAFT-COUNTER TOP (GENERATORS)													
21CET8	2.80	0.057	3.42	1.1	27.36	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0031	ANNUAL	175	16
21CET16	3.80	0.113	6.78	1.4	54.24	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0026	ANNUAL	175	16
21CGA5	4.00	0.113	6.78	1.4	54.24	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0026	ANNUAL	175	16
10 PAN MODELS (GENERATORS)													
24CGA10	7.90	0.185	11.10	1.1	88.80	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0027	6 MONTHS	350	50
24CGA10.2	3.30	0.194	11.64	2.3	93.12	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0027	6 MONTHS	350	50
24CGA10.2ES Energy Star	3.30	0.132	7.90	1.6	63.20	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0026	6 MONTHS	350	16
24CEA10	3.80	0.113	13.56	2.7	108.48	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0027	6 MONTHS	350	50
24CGP10	16.00	0.360	21.60	2.2	172.80	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0012	3 MONTHS	1400	50
CLASSIC CONVECTION SERIES (BOILER BASE)													
200,000 BTU Boilers (24CGM200)	8.00	0.2500	15.00	2.5	120.00	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0012	6 MONTHS	1400	50
300,000 BTU Boilers (36CGM300, 36CGM16300)	12.00	0.3600	21.60	2.2	172.80	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0012	3 MONTHS	1400	50
24 kW Boilers (24CEM24)	9.00	0.1600	9.60	1.0	76.80	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0027	6 MONTHS	350	50
36kW Boilers (24CEM36)	9.00	0.2400	14.40	1.4	115.20	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0012	6 MONTHS	1400	50
48 kW Boilers (24CEM48)	9.00	0.3000	18.00	1.8	144.00	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0012	3 MONTHS	1400	50
CLASSIC PRESSURE SERIES (BOILER BASE)													
24 kW Boilers PEM24	9.00	0.1600	9.60	1.0	76.80	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0027	6 MONTHS	350	50
36kW Boilers PEM36	9.00	0.2400	14.40	1.4	115.20	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0012	6 MONTHS	1400	50
48 kW Boilers PEM48	9.00	0.3000	18.00	1.8	144.00	FLT0040	FLT0014 & FLT0018	FLT0043	FLT0015	FLT0012	3 MONTHS	1400	50

* Max Flow Rate is when steamer is cooking continuously. Idle mode uses significantly less water.

NOTES:

Cleveland Range reserves right of design improvement or modification, as warranted.

Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.

Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are U.L./NSF#4 and CSA (AGA, CGA).

(NOT TO SCALE)

760 Beta Drive, Unit D
Mayfield Village, Ohio 44143

Tel 1.216.481.4900
Fax 1.216.481.3782
Email steam@clevelandrange.com

www.clevelandrange.com
Section 2, Page 10
04 / 2025

Timeless Quality, Trusted For Life®

KE004046-6