

# Cleveland

## POWERPAN™ SERIES

GAS, 37" RIM HEIGHT,  
60 GALLON (227 LITER)

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 FCSI Section 11400 \_\_\_\_\_  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

Braising Pans / Tilting Skillets

### Models

- SGL60T1



Shown with optional easyTouch, with Casters, Faucet



Standard Control

- Exclusive Dual Power Settings: 160,000 Btu and 200,000 Btu for 60 gallons provides superior heat-up and recovery.
- Open base design for easy cleaning and maintenance.
- 5/8" Stainless Steel Bead Blasted cooking surface prevents warping and keeps food from sticking.
- Power Tilt
- Durable 11 gauge, 304 Stainless Steel pan construction. 5/8" (16mm) mild steel clad bottom plus a 1/16" (1.6mm) Stainless Steel plate for even temperature distribution.
- Low 37" rim height for easy operation and cleaning.
- Splash Proof Controls and construction.
- Supplied with Cord & Plug for 115-volt controls.
- Gallon/Liter Markings and Vented Spring Assist Cover standard.
- Available with Optional 2" Tangent Draw-Off Valve/TD2A - ACME Thread/TD2SC - SANI Clamp.
- 10° Cooking Feature. Tilt unit up to 10° without the power being turned off.
- RTD controlling Thermostat accurately controls temperature from 100°F to 425°F.
- Electronic "Spark Ignition System Standard".
- Spring-Assist Cover with full width handle and vent.

### Short Form Specifications

Shall be CLEVELAND, Tilting Skillet Model Number SGL60T1, gas (type\_\_\_\_) holding no less than \_\_\_\_ gallons ( \_\_\_\_ liters); Complete with Dual Power Setting, Normal and High Power Cooking Controls, Power Burner (Forced-Air) Gas Combustion System, Automatic Ignition, Splash-Proof Construction, Spring Assist Cover with Vent, Gallon/Liter Markings, 5/8" Stainless Steel Clad Cooking Surface with Bead Blasted Finish, Easy to use Power Tilt with Enclosed Permanently Lubricated Gearbox, Adjustable Feet with Rear Flanged and Front Bullet Style.

### Standard Features

- Available in 60 gallons (227 liters) open frame design models. Full capacity to bottom of pouring lip.
- Exclusive Ultra Efficient Power Burner (Forced-Air) Gas Combustion System with Automatic Ignition.

### Optional easyTouch 7" Control

- 7" easyTouch UI interface simplifies operations with accurate touch tune
- Multi-step cooking modes, including product temperature probe modes
- Press & Go Recipes with cookbook storage
- Self Diagnostics & Maintenance - error & event logs



7" easyTouch Display

### Options & Accessories

- easyTouch Controls
- Core Temperature Probe Option
- 2" (50 mm) Tangent Draw-Off Valve (TD2SK), left side only
- Faucets
- Hot & Cold Water Pre-Rinse Spray Head with Hose (PRSK)
- Scooper - 8" SS cooking scooper & scraper
- Spaddle - 38" SS cooking spatula paddle
- Poaching Pans (PP)
- Vegetable Steamer Baskets (VS)
- Voltage Option:
  - VOSK3, 440/480 Volt, 60 Hz, 3 Phase
  - VOSK4, 220/240 Volt, 50 Hz, 1 Phase - for export
- Protective Control Cover (CP-PCB-T1)
- Casters, 2 swivel, 2 locking (CST1)


# Cleveland

MODEL	CAPACITY		A	B	C	D	E (COMBUSTIBLE WALL)	E (NON COMBUSTIBLE WALL)	F	G
	US GAL.	LITRES								
SGL-60-T1	60	227	49 7/8	36 1/2	43 3/4	18	3 1/2	2	24 1/4	5 3/4


**SPECIFICATIONS:**

MODEL	ELECTRICAL SUPPLY:				GAS SUPPLY: (PIPING 3/4 NPT)					APPROVALS	CLEARANCE:	SHIPPING WEIGHT
	VOLTS	PHASE	AMPS	FREQ	TYPE	BTU RATING (HIGH)	BTU * RATING (LOW)	WATER COLUMN	BTU PER CU. FT.			
SGL-60-T1	120	1	10	60	NAT	200,000 PER HR.	160 PER HR.	3.5	1025	14" W.C. (MAX)	RIGHT: 1" POWER TILT (WITH FAUCET) LEFT: 0 REAR: 0" (NON-COMBUSTIBLE WALL) 3 1/2" (COMBUSTIBLE WALL)	630 LBS. 285 KGS.
	120	1	10	60	LP	200,000 PER HR.	160 PER HR.	10	2500	14" W.C. (MAX)		

\* FOR UNITS WITH HIGH/LOW FIRE OPTION.

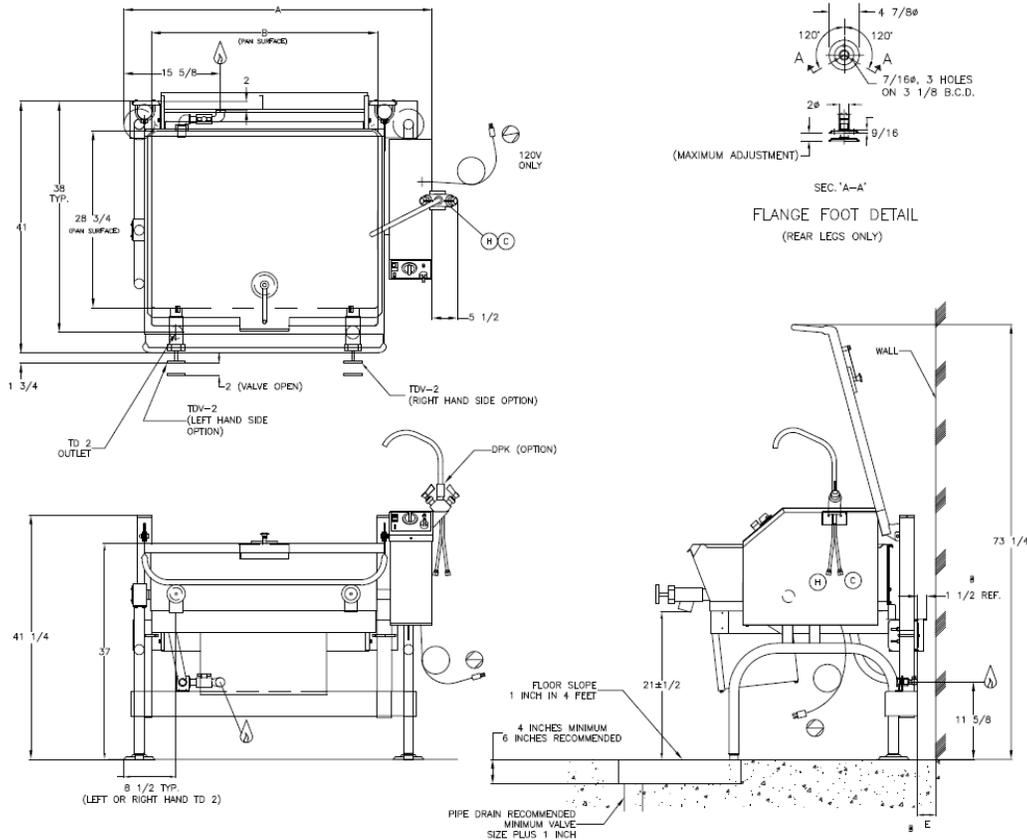

**LEG LOCATIONS & SUGGESTED FLOOR DRAIN DETAILS**

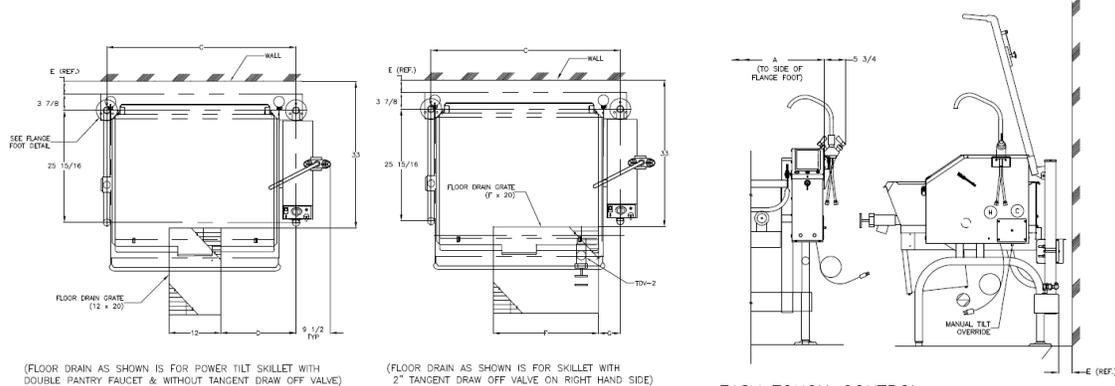

EASY TOUCH CONTROL

(NOT TO SCALE)

Braising Pans / Tilting Skillets

760 Beta Drive, Unit D  
Mayfield Village, Ohio 44143

Tel 1.216.481.4900  
Fax 1.216.481.3782  
Email steam@clevelandrange.com

www.clevelandrange.com  
3 / 2026

Timeless Quality, Trusted For Life®