

POWERPAN™ SERIES

ELECTRIC, 37" RIM HEIGHT
60 gallon (227 LITER)

Project _____
Item _____
Quantity _____
FCSI Section 11400 _____
Approved _____
Date _____

Models

- SEL60T1



Shown with optional
easyTouch, faucets



Standard Control

Standard Features

- Open base design for easy cleaning and maintenance.
- 5/8" Stainless Steel Bead Blasted cooking surface prevents warping and keeps food from sticking.
- Power Tilt
- Durable 11 gauge, 304 Stainless Steel pan construction. 5/8" (16mm) mild steel clad bottom plus a 1/16" (1.6mm) Stainless Steel plate for even temperature distribution.
- Low 37" rim height for easy operation and cleaning.
- Splash Proof Controls and construction.
- Gallon/Liter Markings and Vented Spring Assist Cover standard.
- Available with Optional 2" Tangent Draw-Off Valve/TD2A - ACME Thread/TD2SC - SANI Clamp.
- 10° Cooking Feature. Tilt unit up to 10° without the power being turned off.
- RTD Controlling Thermostat accurately controls temperature from 100°F to 425°F
- Standard Voltages 208-240, single and three phase.
- Spring-Assist Cover with full width handle and vent.

Optional easyTouch 7" Control

- 7" easyTouch UI interface simplifies operations with accurate touch tune
- Multi-step cooking modes, including product temperature probe modes
- Press & Go Recipes with cookbook storage
- Self Diagnostics & Maintenance - error & event logs



7" easyTouch Display

Options & Accessories

- easyTouch Controls
- Core Temperature Probe Option
- 2" (50 mm) Tangent Draw-Off Valve (TD2SK), left side only
- Faucets
- Hot & Cold Water Pre-Rinse Spray Head with Hose (PRSK)
- Scooper - 8" SS cooking scooper & scraper
- Spaddle - 38" SS cooking spatula paddle
- Poaching Pans (PP)
- Vegetable Steamer Baskets (VS)
- Protective Control Cover (CP-PCB-T1)
- High Wattage Option (HW) (required for CE) 24KW on 60 gallons
- Voltage Options:
 - VOSK1, 240 Volt, 60 Hz, 3 Phase
 - VOSK2, 380/415 Volt, 50 Hz, 3 Phase - for export
 - VOSK3, 440/480 Volt, 60 Hz, 3 Phase

Short Form Specifications

Shall be CLEVELAND, Tilting Skillet Model Number SEL60T1, electric (_____ KW, _____ Volts) holding no less than 60 gallons (227 liters); Complete with Thermostatic and Safety Controls, Gallon/Liter Markings, 5/8" Stainless Steel Clad Cooking Surface with Bead Blasted Finish, Easy to use Power Tilt with Enclosed Permanently Lubricated Gearbox, Spring Assist Cover with adjustable Vent, Adjustable Feet with Rear Flanged and Front Bullet Style, Splash Proof Controls.

Braising Pans / Tilting Skillets

SPECIFICATIONS:

Technical drawings of the 1000 Series Flange Foot Detail, showing various views and dimensions.

Top View:

- Overall width: A
- Pan surface width: B (PAN SURFACE)
- Overall height: 41
- Typical height: 39 TYP.
- Pan surface height: $28 \frac{3}{4}$ (PAN SURFACE)
- Bottom flange height: $1 \frac{3}{4}$
- Adjustment dimension: $5 \frac{1}{2}$

Side View:

- Overall height: $41 \frac{1}{4}$
- Internal height: 37
- Bottom flange height: $8 \frac{1}{2}$ (LEFT HAND TO 2)

Front View:

- Overall height: $41 \frac{1}{4}$
- Internal height: 37
- Bottom flange height: $8 \frac{1}{2}$ (LEFT HAND TO 2)

Flange Foot Detail (REAR LEGS ONLY):

- Section line: SEC. A-A'
- Dimensions: $4 \frac{7}{8}$, 120° , $7/16$, 3 HOLES ON $3 \frac{1}{8}$ B.C.D., 2 , $9/16$
- Note: (MAXIMUM ADJUSTMENT)



Other Details:

- TOV-2 (LEFT HAND SIDE OPTION)
- TO 2 OUTLET
- TO 2 (VALVE OPEN)
- DPK (OPTION)
- FLOOR SLOPE: 1 INCH IN 4 FEET
- 4 INCHES MINIMUM 6 INCHES RECOMMENDED
- PIPE DRAIN RECOMMENDED MINIMUM VALVE SIZE PLUS 1 INCH
- WALL
- 73 1/2
- 21 ± 1/2

- POWER TILT
- (CHS) SPRING ASSIST COVER
- (LM) LITER MARKING
- (GM) GALLON MARKING

VOLTAGE & WIRING OTHER THAN STANDARD	OPTION	
(DPK) DOUBLE PANTRY FAUCET (SPK) SINGLE PANTRY FAUCET	OPTION	③ COLD WATER ④ HOT WATER PIPING: 1/2" NPT (DOUBLE) PIPING: 3/8" COPPER TUBE (SINGLE)
(SKFK) SINGLE PANTRY KETTLE FILLER WITH 60" HOSE	OPTION	
(DKFK) DOUBLE PANTRY KETTLE FILLER WITH 60" HOSE	OPTION	
(PRSK) DOUBLE PANTRY PRE-RINSE SPRAY HOSE	OPTION	
(TDV-2) TANGENT DRAW OFF VALVE 2"	OPTION	LOCATED LEFT SIDE OF SKILLET
(FS) FOOD STRAINER	ACCESSORY	
(PCS) PAN CARRIER	ACCESSORY	
(EZH) EASYTOUCH CONTROL	OPTION	POWER TILT, PRODUCT PROBE STD. WITH EZH

FLOOR DRAIN AS SHOWN IS FOR POWER TILT SKILLET WITH
DOUBLE PANTRY FAUCET & WITHOUT TANGENT DRAW OFF VALVE)

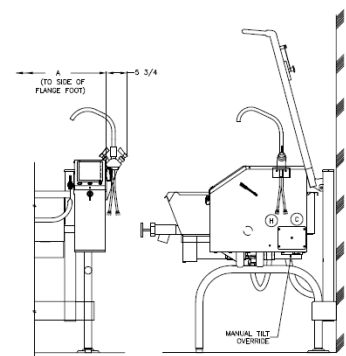

Timeless Quality, Trusted For Life®